


1.0G AC DOB LED Street Light

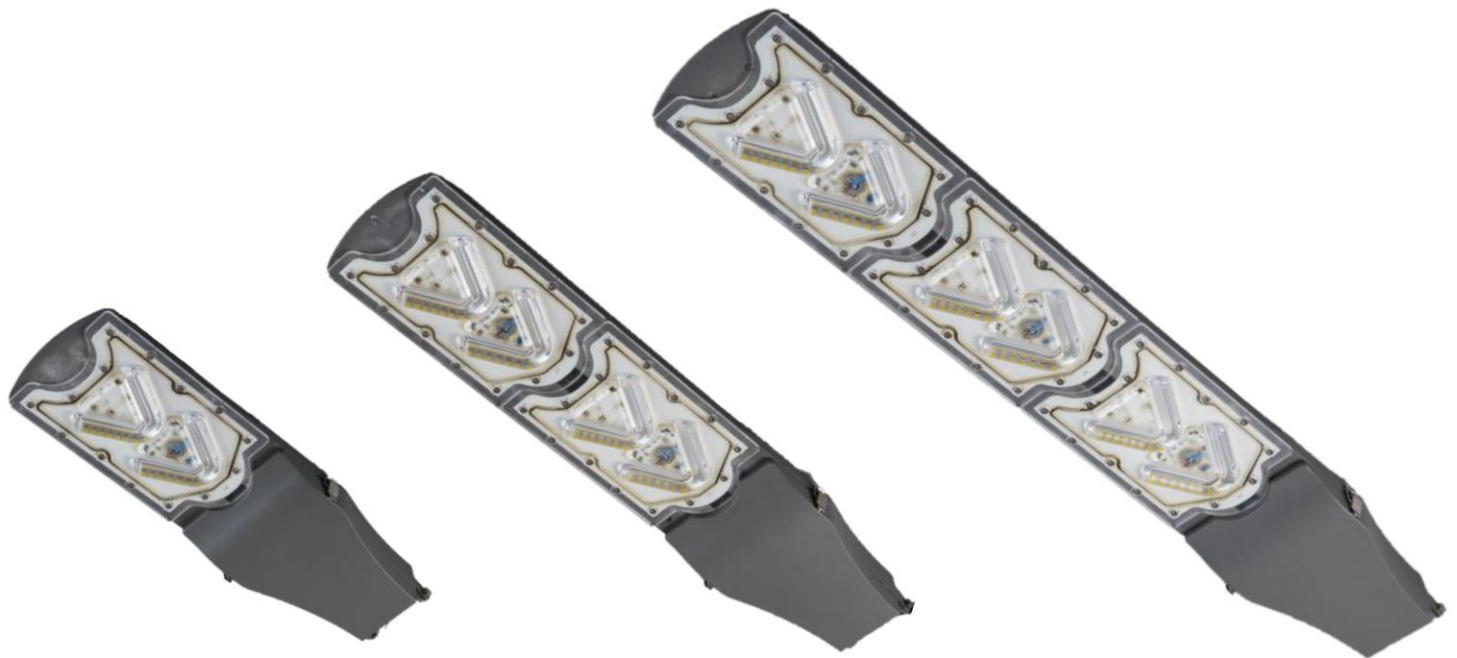

[30/60W]


[90/120W]

[150/180W]

제품 사양 (Product Specification)

	SD-30-1.0	SD-60-1.0	SD-90-1.0	SD-120-1.0	SD-150-1.0	SD-180-1.0
소비전력 (Power Consumption)	30W	60W	90W	120W	150W	180W
전압 (Voltage)	110V, 220V, 277V	110V, 220V, 277V	110V, 220V, 277V	110V, 220V, 277V	110V, 220V, 277V	110V, 220V, 277V
광효율 (Light Efficiency)	100lm/W (95lm/W)	100lm/W (95lm/W)	100lm/W (95lm/W)	100lm/W (95lm/W)	100lm/W (95lm/W)	100lm/W (95lm/W)
연색성 (CRI)	Ra70 (Ra75 for Korea)	Ra70 (Ra75 for Korea)	Ra70 (Ra75 for Korea)	Ra70 (Ra75 for Korea)	Ra70 (Ra75 for Korea)	Ra70 (Ra75 for Korea)
상관색온도 (CCT)	5,000K	5,000K	5,000K	5,000K	5,000K	5,000K
무게 (Weight)	3.2kg	3.2kg	4.4kg	4.4kg	5.5kg	5.5kg
수명 (Life Time)	50,000hrs	50,000hrs	50,000hrs	50,000hrs	50,000hrs	50,000hrs
SPD(option)	22kA	22kA	22kA	22kA	22kA	22kA
배광분류 (Luminous Intensity Distribution)	Type III Medium	Type III Medium	Type III Medium	Type III Medium	Type III Medium	Type III Medium
크기 Size(L x W x H mm)	522 x 180 x 82	522 x 180 x 82	742 x 180 x 82	742 x 180 x 82	962 x 180 x 82	962 x 180 x 82

치수 (Dimension)

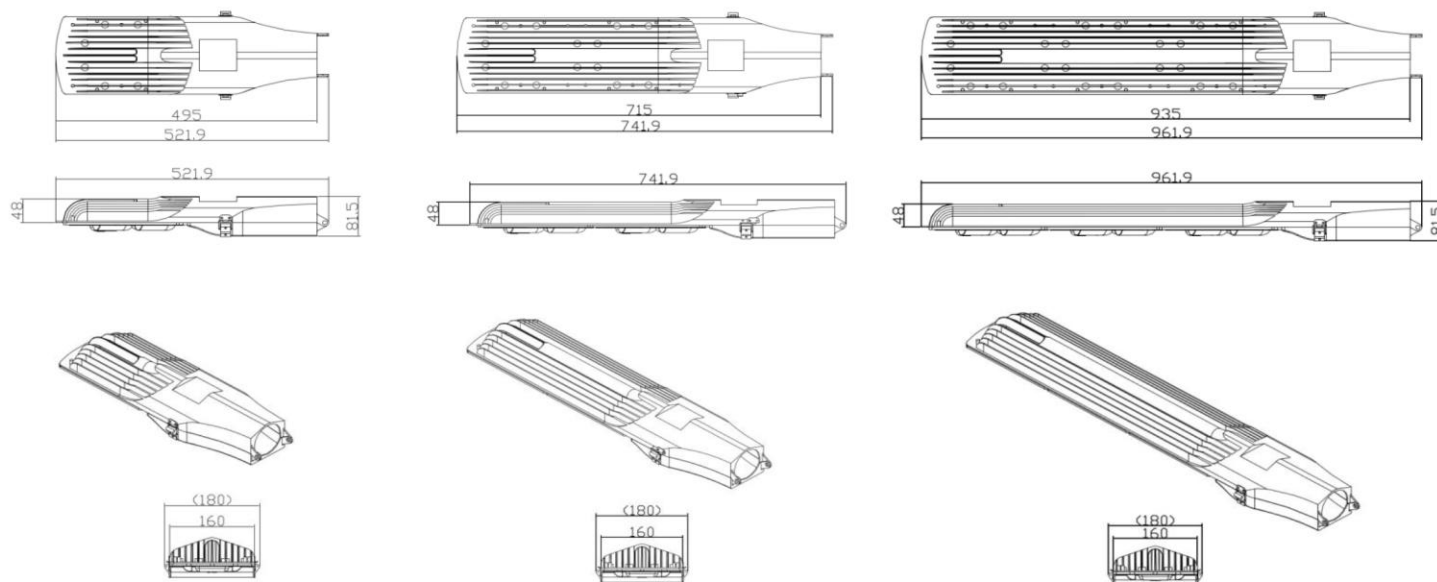


[30/60W]

[90/120W]

[150/180W]

배광곡선 (Intensity Distribution Diagram)

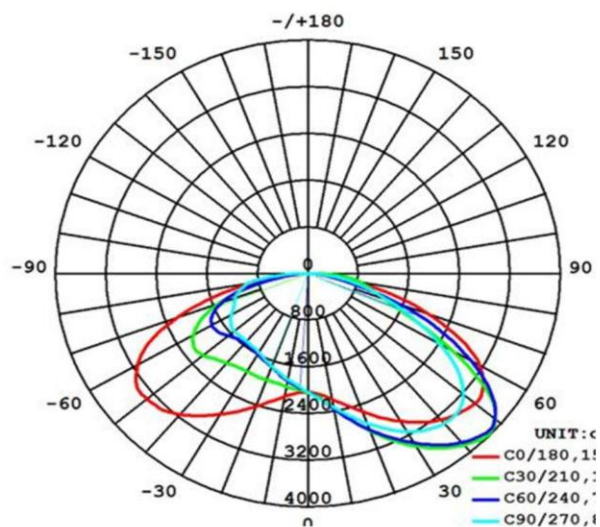

최대광도 면 배광 다이어그램 (Max Intensity Cone Surface Distribution Diagram)

